

E25 UF

CARBIDE TOOL MATERIAL E25 UF

$\lambda = 35^\circ$   
 $\gamma = 10^\circ$

CUTTING ANGLES  $\lambda 35^\circ$   $\gamma 10^\circ$

angle vif

ACUTE ANGLE PRECISION TOOL

DUAL DIRECTION HELICAL DRILL BIT

h<sub>1</sub> 2.2xD

2.2XD DEPTH FOR TOOLS


TOOL LENGTH MEASUREMENT BARS

## MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	21032-1.5
<b>Alloyed and non-alloyed steels</b> <small>Non-alloyed steels</small>	Rm < 450 N/mm <sup>2</sup>	1a	●○○
	Rm 450–700 N/mm <sup>2</sup>	1b	●○○
	Rm 700–900 N/mm <sup>2</sup>	1c	●○○
	Rm > 1200 N/mm <sup>2</sup>	1d	○○○
<b>Stainless steels</b> <small>Stainless steels</small>	Rm < 650 N/mm <sup>2</sup>	2a	●○○
	Rm 650–950 N/mm <sup>2</sup>	2b	●○○
	Rm > 950 N/mm <sup>2</sup>	2c	○○○
<b>Hardened steels</b> <small>Hardened steels</small>	44–56 HRC	3a	○○○
	57–67 HRC	3b	○○○
<b>Exotic materials</b> <small>Special alloys</small>	< 32 HRC	4a	○○○
	> 32 HRC	4b	○○○
<b>Graphite</b> <small>Industrial graphite</small>		5	●○○
<b>Cast iron</b> <small>Grey / nodular cast iron</small>	< 32 HRC	6a	○○○
	> 32 HRC	6b	○○○
<b>Titanium</b> <small>Titanium alloys</small>	Rm < 600 N/mm <sup>2</sup>	7a	●○○
	600 < Rm N/mm <sup>2</sup>	7b	●○○
<b>Nickel alloys</b> <small>Inconel, Hastelloy</small>	Rm < 1000 N/mm <sup>2</sup>	8a	○○○
	Rm > 1000 N/mm <sup>2</sup>	8b	○○○
<b>Copper, brass, bronze</b> <small>Copper-based</small>	Rm < 850 N/mm <sup>2</sup>	9a	●●●
	Rm > 850 N/mm <sup>2</sup>	9b	●●●
<b>Aluminum</b> <small>Aluminum alloys</small>	Si < 0.5%	10a	●●●
	0.5% < Si < 5%	10b	●●●
	Si > 5%	10c	○○○
<b>Synthetic materials</b> <small>Engineering plastics</small>	Thermoplastic	11a	●●●
	Thermoset	11b	●●●
<b>Composite materials</b> <small>Reinforced composites</small>	Glass fiber / GFK	12a	●○○
	Carbon fiber / KFK	12b	●○○
<b>Precious metals</b> <small>Gold, platinum, silver</small>	Gold	13a	●●●
	Platinum	13b	○○○

## TECHNICAL DRAWING

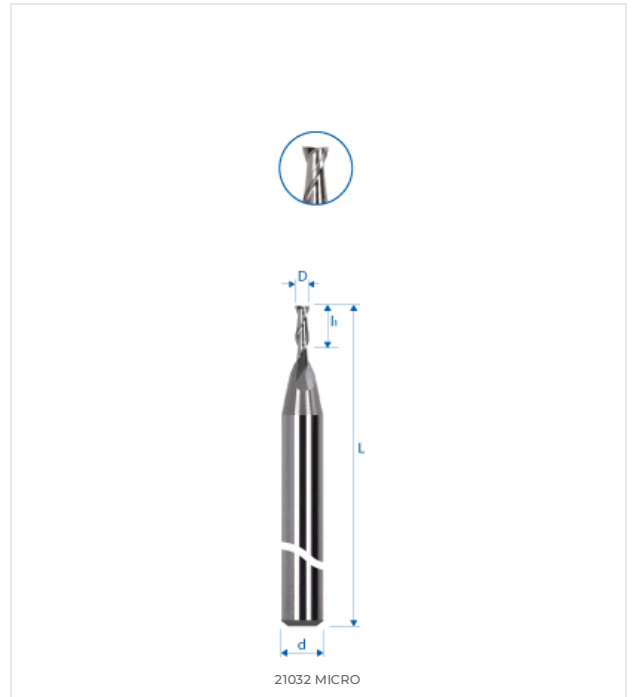

## DIMENSIONS

### NOMINAL DIMENSIONS

D (0 / -0.01)	1.5 mm
d (h5)	3 mm
L	38 mm
l <sub>1</sub>	4 mm
l <sub>3</sub>	–
d <sub>3</sub>	–
R	–
e	–
Z	2
Chamfer K	–
w° collision	6.2°

