


|                                  |  |                                |                                      |                                |                                     |                           |                              |
|----------------------------------|--|--------------------------------|--------------------------------------|--------------------------------|-------------------------------------|---------------------------|------------------------------|
| <br>CARBIDE TOOL MATERIAL E25 UF | <br>CUTTING ANGLES<br>$\lambda=30^{\circ}\text{-}35^{\circ}$<br>$\gamma=8^{\circ}$ | <br>ACUTE ANGLE PRECISION TOOL | <br>DUAL DIRECTION HELICAL DRILL BIT | <br>8XD LENGTH L3 CUTTING TOOL | <br>EXTRA LONG PRECISION DRILL BITS | <br>ADJUSTABLE ANGLE ICON | <br>VARIABLE HELIX DRILL BIT |
|----------------------------------|--|--------------------------------|--------------------------------------|--------------------------------|-------------------------------------|---------------------------|------------------------------|

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●● Good (2/3) ●○ Possible (1/3) ○○○ Not recommended

| MATERIAL   | SPECIFICATION                | GRP | 21038-2.5 |
|--|------------------------------|-----|-----------|
| <b>Alloyed and non-alloyed steels</b><br><small>Non-alloyed steels</small> | Rm < 450 N/mm <sup>2</sup>   | 1a  | ●○        |
|  | Rm 450–700 N/mm <sup>2</sup> | 1b  | ○○        |
|  | Rm 700–900 N/mm <sup>2</sup> | 1c  | ○○        |
|  | Rm > 1200 N/mm <sup>2</sup>  | 1d  | ○○        |
| <b>Stainless steels</b><br><small>Stainless steels</small>                 | Rm < 650 N/mm <sup>2</sup>   | 2a  | ○○        |
|  | Rm 650–950 N/mm <sup>2</sup> | 2b  | ○○        |
|  | Rm > 950 N/mm <sup>2</sup>   | 2c  | ○○        |
| <b>Hardened steels</b><br><small>Hardened steels</small>                   | 44–56 HRC                    | 3a  | ○○        |
|  | 57–67 HRC                    | 3b  | ○○        |
| <b>Exotic materials</b><br><small>Special alloys</small>                   | < 32 HRC                     | 4a  | ○○        |
|  | > 32 HRC                     | 4b  | ○○        |
| <b>Graphite</b><br><small>Industrial graphite</small>                      |                              | 5   | ●○        |
| <b>Cast iron</b><br><small>Grey / nodular cast iron</small>                | < 32 HRC                     | 6a  | ○○        |
|  | > 32 HRC                     | 6b  | ○○        |
| <b>Titanium</b><br><small>Titanium alloys</small>                          | Rm < 600 N/mm <sup>2</sup>   | 7a  | ●○        |
|  | 600 < Rm N/mm <sup>2</sup>   | 7b  | ●○        |
| <b>Nickel alloys</b><br><small>Inconel, Hastelloy</small>                  | Rm < 1000 N/mm <sup>2</sup>  | 8a  | ○○        |
|  | Rm > 1000 N/mm <sup>2</sup>  | 8b  | ○○        |
| <b>Copper, brass, bronze</b><br><small>Copper-based</small>                | Rm < 850 N/mm <sup>2</sup>   | 9a  | ●●●       |
|  | Rm > 850 N/mm <sup>2</sup>   | 9b  | ●●●       |
| <b>Aluminum</b><br><small>Aluminum alloys</small>                          | Si < 0.5%                    | 10a | ●●○       |
|  | 0.5% < Si < 5%               | 10b | ●●○       |
|  | Si > 5%                      | 10c | ○○        |
| <b>Synthetic materials</b><br><small>Engineering plastics</small>          | Thermoplastic                | 11a | ●●●       |
|  | Thermoset                    | 11b | ●●●       |
| <b>Composite materials</b><br><small>Reinforced composites</small>         | Glass fiber / GFK            | 12a | ●○        |
|  | Carbon fiber / KFK           | 12b | ●○        |
| <b>Precious metals</b><br><small>Gold, platinum, silver</small>            | Gold                         | 13a | ●●●       |
|  | Platinum                     | 13b | ○○        |

TECHNICAL DRAWING

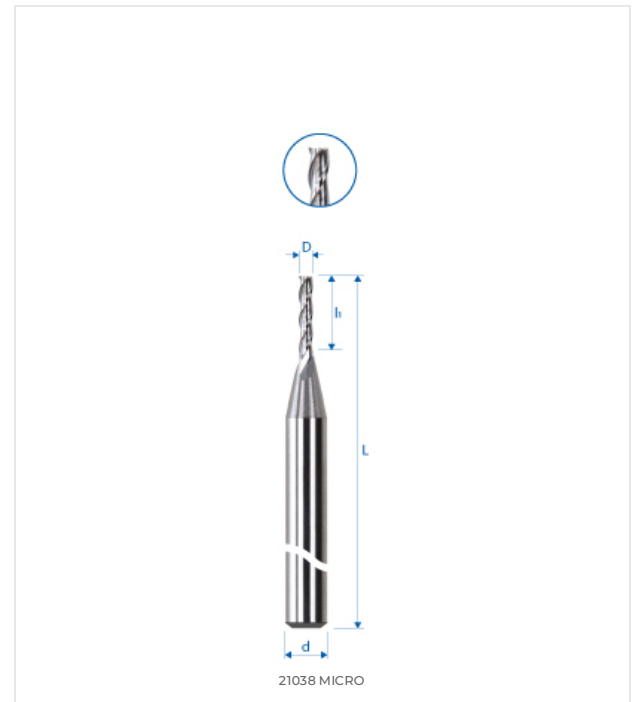

DIMENSIONS

| NOMINAL DIMENSIONS |        |
|--------------------|--------|
| D (0 / -0.01)      | 2.5 mm |
| d (h5)             | 3 mm   |
| L                  | 38 mm  |
| l1                 | 12 mm  |
| l3                 | –      |
| d3                 | –      |
| R                  | –      |
| e                  | –      |
| Z                  | 3      |
| Chamfer K          | –      |
| w° collision       | 1.1°   |

