

MICRO-FRAISE-HÉMISPHERIQUE Z2 · BALL-NOSE- MICRO-ENDMILL Z2 · MICRO-FRÄSER-HALBRUND Z2



21093-0.4

Version 07.05.2026

SWISS MADE


| | | | | | | |
|---|---|------------------------------------|---|--|--|-------------------------------------|
| <p>E25 UF CARBIDE TOOL MATERIAL E25 UF</p> | <p>$\lambda = 30^\circ$ $\gamma = 10^\circ$ CUTTING ANGLES ? 30° ?10°</p> | <p>V-GROOVE CHAMFER TOOL SHAPE</p> | <p>DUAL DIRECTION HELICAL DRILL BIT</p> | <p>h_1 1.5xD 1.5XD DEPTH PRECISION TOOL</p> | <p>l_3 8xD 8XD LENGTH L3 CUTTING TOOL</p> | <p>STANDARD TOOL WEAR INDICATOR</p> |
|---|---|------------------------------------|---|--|--|-------------------------------------|

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

| MATERIAL | SPECIFICATION | GRP | 21093-0.4 |
|--|------------------------------|-----|-----------|
| Alloyed and non-alloyed steels <small>Non-alloyed steels</small> | Rm < 450 N/mm ² | 1a | ●○○ |
| | Rm 450–700 N/mm ² | 1b | ○○○ |
| | Rm 700–900 N/mm ² | 1c | ○○○ |
| | Rm > 1200 N/mm ² | 1d | ○○○ |
| Stainless steels <small>Stainless steels</small> | Rm < 650 N/mm ² | 2a | ○○○ |
| | Rm 650–950 N/mm ² | 2b | ○○○ |
| | Rm > 950 N/mm ² | 2c | ○○○ |
| Hardened steels <small>Hardened steels</small> | 44–56 HRC | 3a | ○○○ |
| | 57–67 HRC | 3b | ○○○ |
| Exotic materials <small>Special alloys</small> | < 32 HRC | 4a | ○○○ |
| | > 32 HRC | 4b | ○○○ |
| Graphite <small>Industrial graphite</small> | | 5 | ●○○ |
| Cast iron <small>Grey / nodular cast iron</small> | < 32 HRC | 6a | ○○○ |
| | > 32 HRC | 6b | ○○○ |
| Titanium <small>Titanium alloys</small> | Rm < 600 N/mm ² | 7a | ●○○ |
| | 600 < Rm N/mm ² | 7b | ●○○ |
| Nickel alloys <small>Inconel, Hastelloy</small> | Rm < 1000 N/mm ² | 8a | ○○○ |
| | Rm > 1000 N/mm ² | 8b | ○○○ |
| Copper, brass, bronze <small>Copper-based</small> | Rm < 850 N/mm ² | 9a | ●●● |
| | Rm > 850 N/mm ² | 9b | ●●● |
| Aluminum <small>Aluminum alloys</small> | Si < 0.5% | 10a | ●●● |
| | 0.5% < Si < 5% | 10b | ●●● |
| | Si > 5% | 10c | ○○○ |
| Synthetic materials <small>Engineering plastics</small> | Thermoplastic | 11a | ●●● |
| | Thermoset | 11b | ●●● |
| Composite materials <small>Reinforced composites</small> | Glass fiber / GFK | 12a | ●○○ |
| | Carbon fiber / KFK | 12b | ●○○ |
| Precious metals <small>Gold, platinum, silver</small> | Gold | 13a | ●●● |
| | Platinum | 13b | ○○○ |

TECHNICAL DRAWING

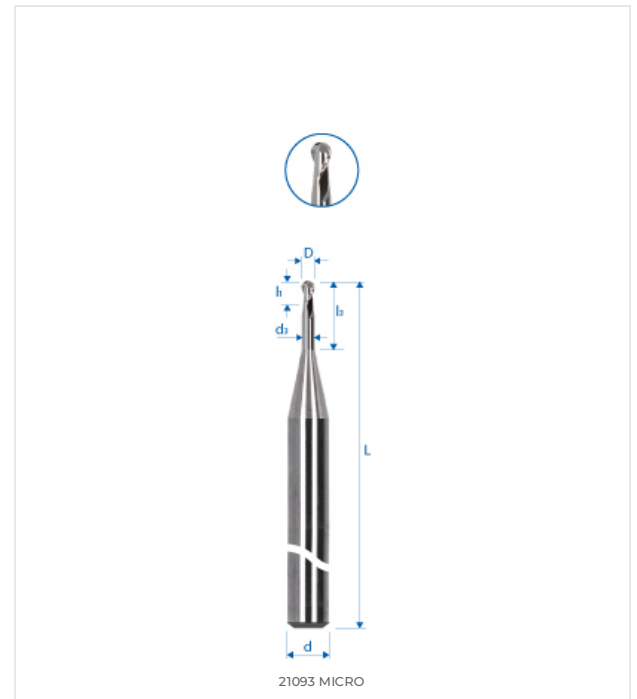

DIMENSIONS

| NOMINAL DIMENSIONS | |
|--------------------|--------|
| D (0 / -0.01) | 0.4 mm |
| d (h5) | 3 mm |
| L | 38 mm |
| l1 | 0.6 mm |
| l3 | 2 mm |
| d3 | – |
| R | 0.2 mm |
| e | – |
| Z | 2 |
| Chamfer K | – |
| w° collision | 10° |



E-SHOP / EZI CUT
eskenazi.ch/eshop/21093-0.4

© 2026 Eskenazi SA — Carouge, Genève
All rights reserved