


<p><b>E2</b> E2 HIGH PRECISION TOOL MATERIAL</p>	<p><math>\lambda=40^{\circ}-45^{\circ}</math> <math>Y=18^{\circ}</math> CUTTING ANGLES <math>\lambda=40^{\circ}-45^{\circ}</math>, <math>Y=18^{\circ}</math></p>	<p><math>0&lt;K&lt;9</math> <math>0&gt;C&lt;6</math> <math>90^{\circ}</math> <math>45^{\circ}</math> CHAMFER <math>\phi &lt; 6</math> <math>\phi &gt; 6</math> <math>90^{\circ}</math> <math>45^{\circ}</math></p>	<p>DUAL DIRECTION HELICAL DRILL BIT</p>	<p><math>1.5 \times D</math> 1.5XD DEPTH PRECISION TOOL</p>	<p><b>I3</b> THREE-POINT CONTACT TOOL</p>	<p>STANDARD TOOL WEAR INDICATOR</p>	<p>ADJUSTABLE ANGLE ICON</p>	<p><math>\lambda 2</math> <math>\lambda 1</math> VARIABLE HELIX DRILL BIT</p>
--	--	--	---	---	---	-------------------------------------	------------------------------	---

**MATERIAL COMPATIBILITY**

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	21325-6
<b>Alloyed and non-alloyed steels</b> <small>Non-alloyed steels</small>	Rm < 450 N/mm <sup>2</sup>	1a	○○○
	Rm 450–700 N/mm <sup>2</sup>	1b	○○○
	Rm 700–900 N/mm <sup>2</sup>	1c	○○○
	Rm > 1200 N/mm <sup>2</sup>	1d	○○○
<b>Stainless steels</b> <small>Stainless steels</small>	Rm < 650 N/mm <sup>2</sup>	2a	○○○
	Rm 650–950 N/mm <sup>2</sup>	2b	○○○
	Rm > 950 N/mm <sup>2</sup>	2c	○○○
<b>Hardened steels</b> <small>Hardened steels</small>	44–56 HRC	3a	○○○
	57–67 HRC	3b	○○○
<b>Exotic materials</b> <small>Special alloys</small>	< 32 HRC	4a	○○○
	> 32 HRC	4b	○○○
<b>Graphite</b> <small>Industrial graphite</small>		5	●○○
<b>Cast iron</b> <small>Grey / nodular cast iron</small>	< 32 HRC	6a	○○○
	> 32 HRC	6b	○○○
<b>Titanium</b> <small>Titanium alloys</small>	Rm < 600 N/mm <sup>2</sup>	7a	○○○
	600 < Rm N/mm <sup>2</sup>	7b	○○○
<b>Nickel alloys</b> <small>Inconel, Hastelloy</small>	Rm < 1000 N/mm <sup>2</sup>	8a	○○○
	Rm > 1000 N/mm <sup>2</sup>	8b	○○○
<b>Copper, brass, bronze</b> <small>Copper-based</small>	Rm < 850 N/mm <sup>2</sup>	9a	●●●
	Rm > 850 N/mm <sup>2</sup>	9b	●●●
<b>Aluminum</b> <small>Aluminum alloys</small>	Si < 0.5%	10a	●●○
	0.5% < Si < 5%	10b	●●○
	Si > 5%	10c	○○○
<b>Synthetic materials</b> <small>Engineering plastics</small>	Thermoplastic	11a	●●●
	Thermoset	11b	●●●
<b>Composite materials</b> <small>Reinforced composites</small>	Glass fiber / GFK	12a	●○○
	Carbon fiber / KFK	12b	●○○
<b>Precious metals</b> <small>Gold, platinum, silver</small>	Gold	13a	●○○
	Platinum	13b	○○○

**TECHNICAL DRAWING**

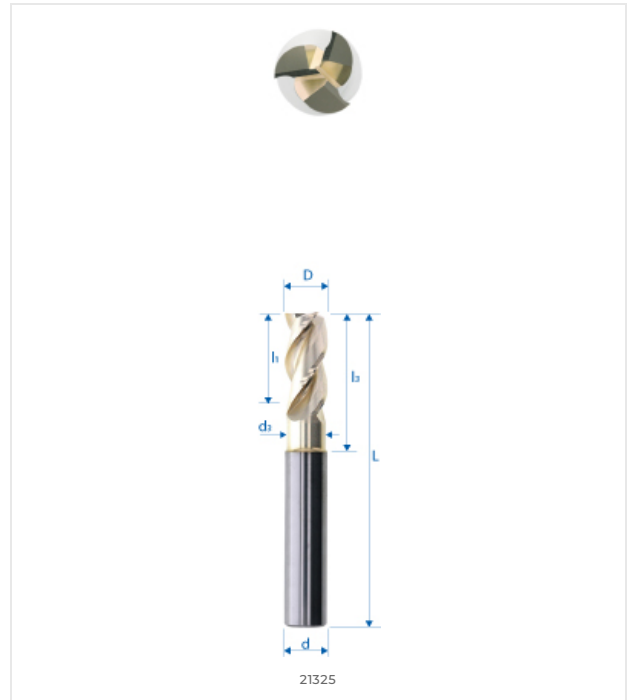

**DIMENSIONS**

NOMINAL DIMENSIONS	
D (0 / -0.01)	6 mm
d (h5)	6 mm
L	57 mm
l1	13 mm
l3	20 mm
d3	–
R	–
e	–
Z	3
Chamfer K	–
w° collision	–



E-SHOP / EZI CUT  
[eskenazi.ch/eshop/21325-6](https://eskenazi.ch/eshop/21325-6)