

# FRAISE-1/4-DE-CERCLE-CONCAVE-MD-E2 · FORM-RELIEVED-CORNER-ROUDING-TOOL-SC-E2 · KONKAV-VIERTELKREISFRÄSER-HM-E2



SWISS MADE

21740-16-R5

Version 07.05.2026

E2

E2 HIGH PRECISION TOOL MATERIAL

$\lambda = 0^\circ$   
 $\gamma = 10^\circ$

TOOL LAMBDA ANGLE  $0^\circ$  GAMMA  $10^\circ$



CONCAVE U-GROOVE CUTTING TOOL




LATERAL CUTTING TWIST DRILL BIT

## MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●● Good (2/3) ●○ Possible (1/3) ○○ Not recommended

| MATERIAL  | SPECIFICATION                | GRP | 21740-16-R5 |
|---|------------------------------|-----|-------------|
| <b>Alloyed and non-alloyed steels</b><br>Non-alloyed steels | Rm < 450 N/mm <sup>2</sup>   | 1a  | ●○          |
|   | Rm 450–700 N/mm <sup>2</sup> | 1b  | ●○          |
|   | Rm 700–900 N/mm <sup>2</sup> | 1c  | ●○          |
|   | Rm > 1200 N/mm <sup>2</sup>  | 1d  | ○○          |
| <b>Stainless steels</b><br>Stainless steels                 | Rm < 650 N/mm <sup>2</sup>   | 2a  | ●○          |
|   | Rm 650–950 N/mm <sup>2</sup> | 2b  | ●○          |
|   | Rm > 950 N/mm <sup>2</sup>   | 2c  | ○○          |
| <b>Hardened steels</b><br>Hardened steels                   | 44–56 HRC                    | 3a  | ○○          |
|   | 57–67 HRC                    | 3b  | ○○          |
| <b>Exotic materials</b><br>Special alloys                   | < 32 HRC                     | 4a  | ○○          |
|   | > 32 HRC                     | 4b  | ○○          |
| <b>Graphite</b><br>Industrial graphite                      |                              | 5   | ●○          |
| <b>Cast iron</b><br>Grey / nodular cast iron                | < 32 HRC                     | 6a  | ○○          |
|   | > 32 HRC                     | 6b  | ○○          |
| <b>Titanium</b><br>Titanium alloys                          | Rm < 600 N/mm <sup>2</sup>   | 7a  | ●○          |
|   | 600 < Rm N/mm <sup>2</sup>   | 7b  | ●○          |
| <b>Nickel alloys</b><br>Inconel, Hastelloy                  | Rm < 1000 N/mm <sup>2</sup>  | 8a  | ○○          |
|   | Rm > 1000 N/mm <sup>2</sup>  | 8b  | ○○          |
| <b>Copper, brass, bronze</b><br>Copper-based                | Rm < 850 N/mm <sup>2</sup>   | 9a  | ●●●         |
|   | Rm > 850 N/mm <sup>2</sup>   | 9b  | ●●●         |
| <b>Aluminum</b><br>Aluminum alloys                          | Si < 0.5%                    | 10a | ●●●         |
|   | 0.5% < Si < 5%               | 10b | ●●●         |
|   | Si > 5%                      | 10c | ●○          |
| <b>Synthetic materials</b><br>Engineering plastics          | Thermoplastic                | 11a | ●●●         |
|   | Thermoset                    | 11b | ●●●         |
| <b>Composite materials</b><br>Reinforced composites         | Glass fiber / GFK            | 12a | ●○          |
|   | Carbon fiber / KFK           | 12b | ●○          |
| <b>Precious metals</b><br>Gold, platinum, silver            | Gold                         | 13a | ●●●         |
|   | Platinum                     | 13b | ●○          |

## TECHNICAL DRAWING

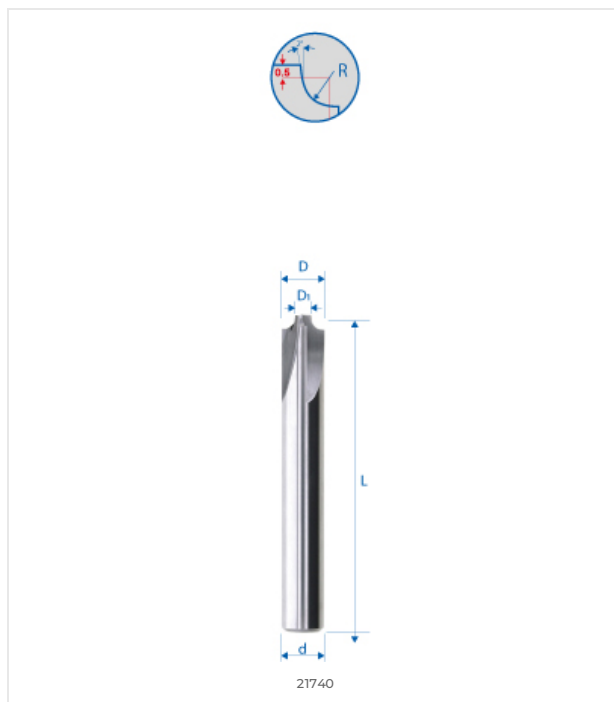

## DIMENSIONS

| NOMINAL DIMENSIONS |       |
|--------------------|-------|
| D (0 / -0.01)      | 16 mm |
| d (h5)             | 16 mm |
| L                  | 92 mm |
| l1                 | 5 mm  |
| l3                 | -     |
| d3                 | -     |
| R                  | -     |
| e                  | 5 mm  |
| Z                  | 4     |
| Chamfer K          | -     |
| w° collision       | -     |



E-SHOP / EZI CUT  
eskenazi.ch/eshop/21740-16-R5

© 2026 Eskenazi SA — Carouge, Genève  
All rights reserved