

FORET-2-LÈVRES-MD-E25UF-+-EZI-SMOOTH · 2-FLUTES-DRILL-SC-E2-5-UF-+-EZI-SMOOTH · ZWEI-LIPPEN-BOHRER-HM-E25-UF-+-EZI-SMOOTH



SWISS MADE

48401S-2.71

Version 07.05.2026

E25
UF

CARBIDE TOOL MATERIAL E25 UF

$\lambda = 20^\circ$

20° LAMBDA CUTTING ANGLE



90° RIGHT ANGLE DRILL BIT




TOOL LENGTH MEASUREMENT BARS

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	48401S-2.71
Alloyed and non-alloyed steels Non-alloyed steels	Rm < 450 N/mm ²	1a	●●●
	Rm 450–700 N/mm ²	1b	●●●
	Rm 700–900 N/mm ²	1c	●●●
	Rm > 1200 N/mm ²	1d	●●○
Stainless steels Stainless steels	Rm < 650 N/mm ²	2a	●●●
	Rm 650–950 N/mm ²	2b	●●●
	Rm > 950 N/mm ²	2c	●●●
Hardened steels Hardened steels	44–56 HRC	3a	●○○
	57–67 HRC	3b	○○○
Exotic materials Special alloys	< 32 HRC	4a	●●○
	> 32 HRC	4b	●●○
Graphite Industrial graphite		5	●●●
Cast iron Grey / nodular cast iron	< 32 HRC	6a	●●●
	> 32 HRC	6b	●●●
Titanium Titanium alloys	Rm < 600 N/mm ²	7a	●●●
	600 < Rm N/mm ²	7b	●●●
Nickel alloys Inconel, Hastelloy	Rm < 1000 N/mm ²	8a	●●○
	Rm > 1000 N/mm ²	8b	●○○
Copper, brass, bronze Copper-based	Rm < 850 N/mm ²	9a	●●●
	Rm > 850 N/mm ²	9b	●●●
Aluminum Aluminum alloys	Si < 0.5%	10a	●●●
	0.5% < Si < 5%	10b	●●●
	Si > 5%	10c	●●○
Synthetic materials Engineering plastics	Thermoplastic	11a	●●●
	Thermoset	11b	●●●
Composite materials Reinforced composites	Glass fiber / GFK	12a	●●●
	Carbon fiber / KFK	12b	●●●
Precious metals Gold, platinum, silver	Gold	13a	●●●
	Platinum	13b	●○○

TECHNICAL DRAWING

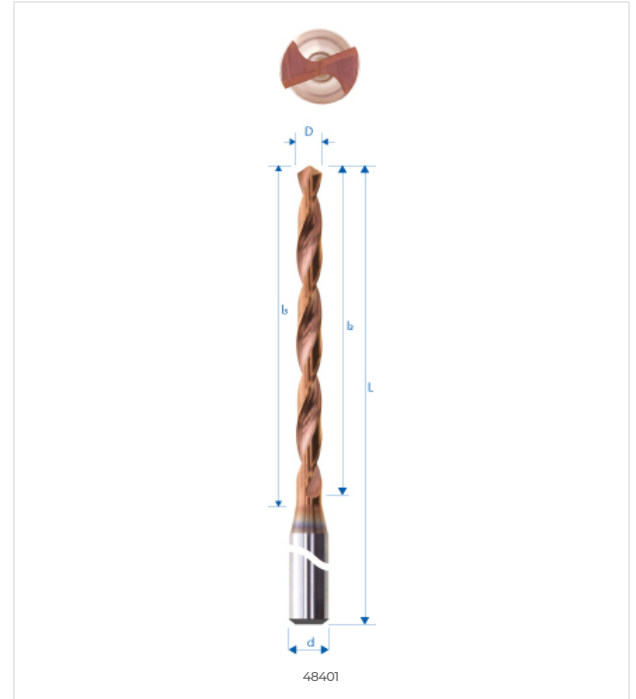

DIMENSIONS

NOMINAL DIMENSIONS	
D (0 / -0.01)	2.71 mm
d (h5)	3 mm
L	65 mm
l1	32.5 mm
l3	36.5 mm
d3	–
R	–
e	–
Z	2
Chamfer K	–
w° collision	0.2°



E-SHOP / EZI CUT
eskenazi.ch/eshop/48401S-2.71

© 2026 Eskenazi SA — Carouge, Genève
All rights reserved