


| | | | | | |
|---|---|--|---|---|-------------------------------------|
| <p>E25 UF</p> <p>CARBIDE TOOL MATERIAL E25 UF</p> | <p>$\lambda = 35^\circ$ $\gamma = 10^\circ$</p> <p>CUTTING ANGLES γ 35° ? 10°</p> | <p>angle vif</p> <p>ACUTE ANGLE PRECISION TOOL</p> | <p>DUAL DIRECTION HELICAL DRILL BIT</p> | <p>2.2xD</p> <p>2.2xD DEPTH FOR TOOLS</p> | <p>TOOL LENGTH MEASUREMENT BARS</p> |
|---|---|--|---|---|-------------------------------------|

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

| MATERIAL | SPECIFICATION | GRP | 21032A-0.1 |
|---|------------------------------|-----|------------|
| Alloyed and non-alloyed steels Non-alloyed steels | Rm < 450 N/mm ² | 1a | ●●○ |
| | Rm 450–700 N/mm ² | 1b | ●●○ |
| | Rm 700–900 N/mm ² | 1c | ●●○ |
| | Rm > 1200 N/mm ² | 1d | ●○○ |
| Stainless steels Stainless steels | Rm < 650 N/mm ² | 2a | ●●○ |
| | Rm 650–950 N/mm ² | 2b | ●●○ |
| | Rm > 950 N/mm ² | 2c | ●○○ |
| Hardened steels Hardened steels | 44–56 HRC | 3a | ○○○ |
| | 57–67 HRC | 3b | ○○○ |
| Exotic materials Special alloys | < 32 HRC | 4a | ●○○ |
| | > 32 HRC | 4b | ●○○ |
| Graphite Industrial graphite | | 5 | ●●○ |
| Cast iron Grey / nodular cast iron | < 32 HRC | 6a | ●●○ |
| | > 32 HRC | 6b | ●●○ |
| Titanium Titanium alloys | Rm < 600 N/mm ² | 7a | ●●○ |
| | 600 < Rm N/mm ² | 7b | ●●○ |
| Nickel alloys Inconel, Hastelloy | Rm < 1000 N/mm ² | 8a | ●○○ |
| | Rm > 1000 N/mm ² | 8b | ●○○ |
| Copper, brass, bronze Copper-based | Rm < 850 N/mm ² | 9a | ●●○ |
| | Rm > 850 N/mm ² | 9b | ●●○ |
| Aluminum Aluminum alloys | Si < 0.5% | 10a | ●○○ |
| | 0.5% < Si < 5% | 10b | ●○○ |
| | Si > 5% | 10c | ●○○ |
| Synthetic materials Engineering plastics | Thermoplastic | 11a | ○○○ |
| | Thermoset | 11b | ○○○ |
| Composite materials Reinforced composites | Glass fiber / GFK | 12a | ●●○ |
| | Carbon fiber / KFK | 12b | ●●○ |
| Precious metals Gold, platinum, silver | Gold | 13a | ●○○ |
| | Platinum | 13b | ●○○ |

TECHNICAL DRAWING

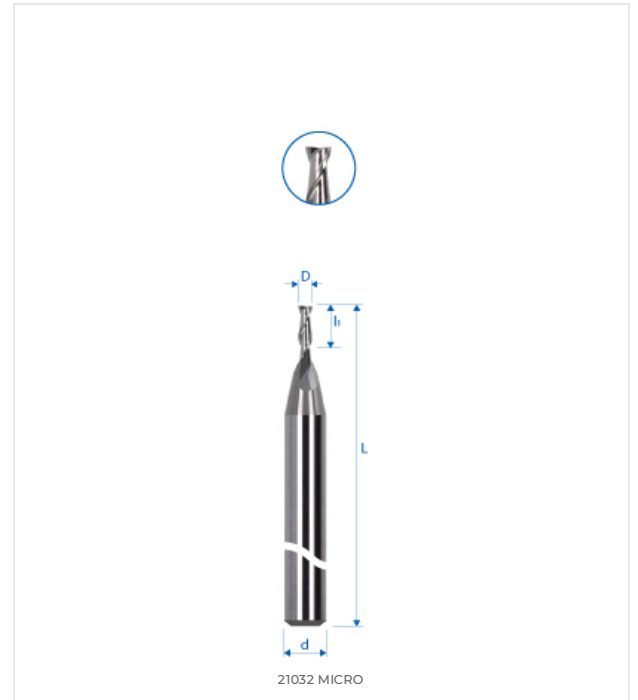

DIMENSIONS

| NOMINAL DIMENSIONS | |
|--------------------|--------|
| D (0 / -0.01) | 0.1 mm |
| d (h5) | 3 mm |
| L | 38 mm |
| l1 | 0.2 mm |
| l3 | – |
| d3 | – |
| R | – |
| e | – |
| Z | 2 |
| Chamfer K | – |
| w° collision | 12.8° |

