


MICRO-FRAISE-TORIQUE-MD-E25UF-+-EZI-ALPHA-+L3 ·  
 TORIC-MICRO-ENDMILL-HM-E25UF-+-EZI-ALPHA ·  
 TORISCHE-MICROFRÄSER-HM-E25UF-+-EZI-ALPHA



21072A-0.6

Version 07.05.2026


<b>E25 UF</b> CARBIDE TOOL MATERIAL E25 UF	$\lambda=30^{\circ}\text{-}35^{\circ}$ $\gamma=8^{\circ}$ CUTTING ANGLES $\gamma$ 30°-35° $\gamma$ 8°	U-SHAPED GROOVE TOOL PROFILE	DUAL DIRECTION HELICAL DRILL BIT	$h_1$ 1.5xD 1.5XD DEPTH PRECISION TOOL	$l_3$ 8xD 8XD LENGTH L3 CUTTING TOOL	STANDARD TOOL WEAR INDICATOR	ADJUSTABLE ANGLE ICON	$\lambda_2$ $\lambda_1$ VARIABLE HELIX DRILL BIT
---	---	------------------------------	----------------------------------	--	--	------------------------------	-----------------------	--

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	21072A-0.6
<b>Alloyed and non-alloyed steels</b> Non-alloyed steels	Rm < 450 N/mm <sup>2</sup>	1a	●●●
	Rm 450–700 N/mm <sup>2</sup>	1b	●●●
	Rm 700–900 N/mm <sup>2</sup>	1c	●●●
	Rm > 1200 N/mm <sup>2</sup>	1d	●●●
<b>Stainless steels</b> Stainless steels	Rm < 650 N/mm <sup>2</sup>	2a	●●●
	Rm 650–950 N/mm <sup>2</sup>	2b	●●●
	Rm > 950 N/mm <sup>2</sup>	2c	●●●
<b>Hardened steels</b> Hardened steels	44–56 HRC	3a	●●○
	57–67 HRC	3b	●○○
<b>Exotic materials</b> Special alloys	< 32 HRC	4a	●●○
	> 32 HRC	4b	●●○
<b>Graphite</b> Industrial graphite		5	●●○
<b>Cast iron</b> Grey / nodular cast iron	< 32 HRC	6a	●●○
	> 32 HRC	6b	●●○
<b>Titanium</b> Titanium alloys	Rm < 600 N/mm <sup>2</sup>	7a	●●●
	600 < Rm N/mm <sup>2</sup>	7b	●●●
<b>Nickel alloys</b> Inconel, Hastelloy	Rm < 1000 N/mm <sup>2</sup>	8a	●●●
	Rm > 1000 N/mm <sup>2</sup>	8b	●●●
<b>Copper, brass, bronze</b> Copper-based	Rm < 850 N/mm <sup>2</sup>	9a	●○○
	Rm > 850 N/mm <sup>2</sup>	9b	●○○
<b>Aluminum</b> Aluminum alloys	Si < 0.5%	10a	●○○
	0.5% < Si < 5%	10b	●○○
	Si > 5%	10c	●●○
<b>Synthetic materials</b> Engineering plastics	Thermoplastic	11a	●●●
	Thermoset	11b	●●●
<b>Composite materials</b> Reinforced composites	Glass fiber / GFK	12a	●●○
	Carbon fiber / KFK	12b	●●○
<b>Precious metals</b> Gold, platinum, silver	Gold	13a	●●○
	Platinum	13b	●●○

TECHNICAL DRAWING

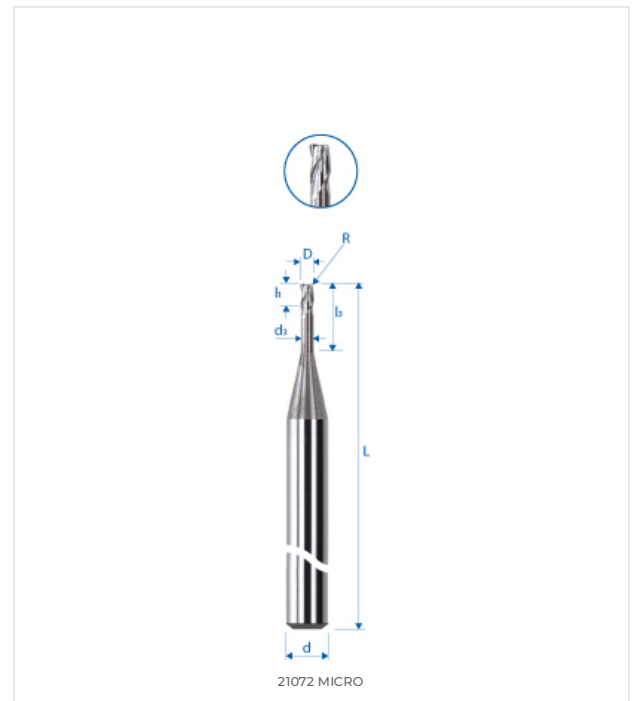

DIMENSIONS

NOMINAL DIMENSIONS	
D (0 / -0.01)	0.6 mm
d (h5)	3 mm
L	38 mm
l1	0.8 mm
l3	3 mm
d3	–
R	0.05 mm
e	–
Z	3
Chamfer K	–
w° collision	8.6°



E-SHOP / EZI CUT  
[eskenazi.ch/eshop/21072A-0.6](https://eskenazi.ch/eshop/21072A-0.6)

© 2026 Eskenazi SA — Carouge, Genève  
All rights reserved