

FRAISE-DE-FINITION-LONGUE-MD-E2 · FINISHING- ENDMILL-LONG-SC-E2 · SCHLICHTFRÄSER-LANG-HM-E2



21145-16

Version 21.06.2026

SWISS MADE


E2 E2 HIGH PRECISION TOOL MATERIAL	$\lambda = 45^\circ$ $\gamma = 8^\circ$ CUTTING ANGLES $\gamma 45^\circ \gamma$ 8°	$\phi < \phi >$ 90° 45° CHAMFER $\phi < \phi > 6 \phi > 6$ 90° 45°	 LATERAL CUTTING TWIST DRILL BIT	l_3 8xD 8XD LENGTH L3 CUTTING TOOL	 EXTRA LONG PRECISION DRILL BITS
---	---	---	--	---	--

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	21145-16
Alloyed and non-alloyed steels Non-alloyed steels	Rm < 450 N/mm ²	1a	●○○
	Rm 450–700 N/mm ²	1b	●○○
	Rm 700–900 N/mm ²	1c	○○○
	Rm > 1200 N/mm ²	1d	○○○
Stainless steels Stainless steels	Rm < 650 N/mm ²	2a	○○○
	Rm 650–950 N/mm ²	2b	○○○
	Rm > 950 N/mm ²	2c	○○○
Hardened steels Hardened steels	44–56 HRC	3a	○○○
	57–67 HRC	3b	○○○
Exotic materials Special alloys	< 32 HRC	4a	○○○
	> 32 HRC	4b	○○○
Graphite Industrial graphite		5	●●○
Cast iron Grey / nodular cast iron	< 32 HRC	6a	●○○
	> 32 HRC	6b	●○○
Titanium Titanium alloys	Rm < 600 N/mm ²	7a	●○○
	600 < Rm N/mm ²	7b	●○○
Nickel alloys Inconel, Hastelloy	Rm < 1000 N/mm ²	8a	○○○
	Rm > 1000 N/mm ²	8b	○○○
Copper, brass, bronze Copper-based	Rm < 850 N/mm ²	9a	●●●
	Rm > 850 N/mm ²	9b	●●●
Aluminum Aluminum alloys	Si < 0.5%	10a	●●○
	0.5% < Si < 5%	10b	●●○
	Si > 5%	10c	○○○
Synthetic materials Engineering plastics	Thermoplastic	11a	●●○
	Thermoset	11b	●●○
Composite materials Reinforced composites	Glass fiber / GFK	12a	●○○
	Carbon fiber / KFK	12b	●○○
Precious metals Gold, platinum, silver	Gold	13a	●●●
	Platinum	13b	●○○

TECHNICAL DRAWING

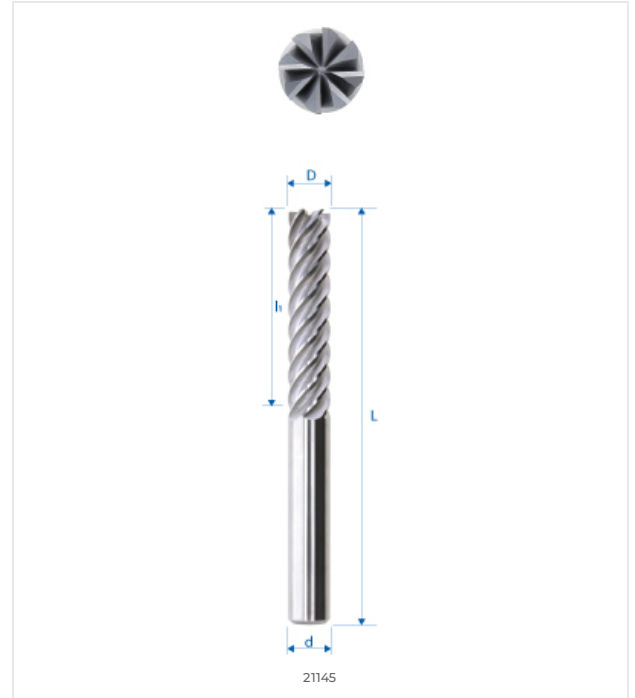

DIMENSIONS

NOMINAL DIMENSIONS

D (0 / -0.01)	16 mm
d (h5)	16 mm
L	123 mm
l	63 mm
l ₃	–
d ₃	–
R	–
e	–
Z	8
Chamfer K	0.1
w° collision	–



E-SHOP / EZI CUT
eskenazi.ch/eshop/21145-16

© 2026 Eskenazi SA — Carouge, Genève
All rights reserved