

FRAISE-PROFIL-ÉBAUCHE-MD-E2-+-AL-EZI-+L3 · ROUGHIN-ENDMILL-SC-E2-+-AL-EZI · SCHAFT- SCHRUPPFRÄSE-HM-E2-+-AL-EZI



SWISS MADE

21603H-10

Version 21.06.2026


E2 E2 HIGH PRECISION TOOL MATERIAL	$\lambda = 40^\circ$ $\gamma = 18^\circ$ CUTTING ANGLES ? 40° ? 18°	45° 45° PRECISION ANGLE MEASUREMENT	 DUAL DIRECTION HELICAL DRILL BIT	l_1 2.2xD 2.2XD DEPTH FOR TOOLS	l3 THREE-POINT CONTACT TOOL	 EXTRA LONG PRECISION DRILL BITS
---	--	---	---	--	-----------------------------------	--

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	21603H-10
Alloyed and non-alloyed steels Non-alloyed steels	Rm < 450 N/mm ²	1a	○○○
	Rm 450–700 N/mm ²	1b	○○○
	Rm 700–900 N/mm ²	1c	○○○
	Rm > 1200 N/mm ²	1d	○○○
Stainless steels Stainless steels	Rm < 650 N/mm ²	2a	○○○
	Rm 650–950 N/mm ²	2b	○○○
	Rm > 950 N/mm ²	2c	○○○
Hardened steels Hardened steels	44–56 HRC	3a	○○○
	57–67 HRC	3b	○○○
Exotic materials Special alloys	< 32 HRC	4a	○○○
	> 32 HRC	4b	○○○
Graphite Industrial graphite		5	○○○
Cast iron Grey / nodular cast iron	< 32 HRC	6a	○○○
	> 32 HRC	6b	○○○
Titanium Titanium alloys	Rm < 600 N/mm ²	7a	○○○
	600 < Rm N/mm ²	7b	○○○
Nickel alloys Inconel, Hastelloy	Rm < 1000 N/mm ²	8a	○○○
	Rm > 1000 N/mm ²	8b	○○○
Copper, brass, bronze Copper-based	Rm < 850 N/mm ²	9a	●●●
	Rm > 850 N/mm ²	9b	●●●
Aluminum Aluminum alloys	Si < 0.5%	10a	●●●
	0.5% < Si < 5%	10b	●●●
	Si > 5%	10c	●●○
Synthetic materials Engineering plastics	Thermoplastic	11a	○○○
	Thermoset	11b	○○○
Composite materials Reinforced composites	Glass fiber / GFK	12a	○○○
	Carbon fiber / KFK	12b	○○○
Precious metals Gold, platinum, silver	Gold	13a	○○○
	Platinum	13b	○○○

TECHNICAL DRAWING

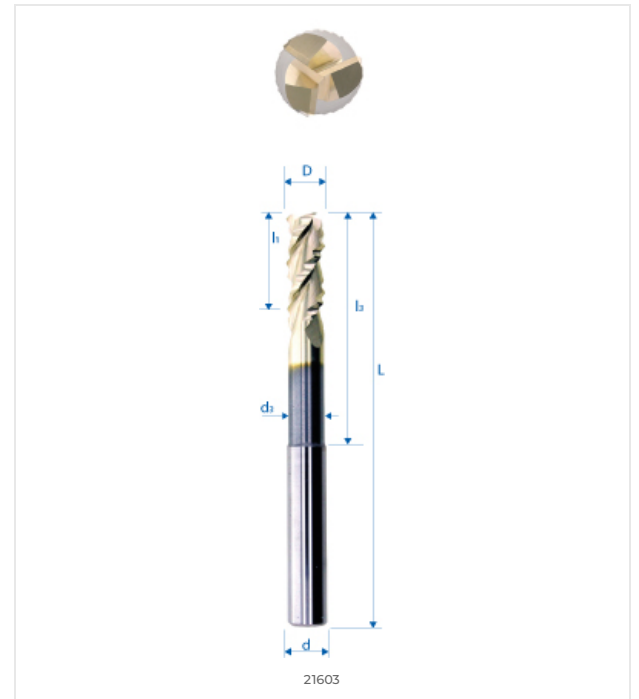

DIMENSIONS

NOMINAL DIMENSIONS	
D (0 / -0.01)	10 mm
d (h5)	10 mm
L	95 mm
l1	22 mm
l3	54 mm
d3	–
R	–
e	–
Z	3
Chamfer K	0.6
w° collision	–



E-SHOP / EZI CUT
eskenazi.ch/eshop/21603H-10