

FRAISE-À-GRAVER-À-RAYON-MD-E25UF-+-EZI_ALPHA ·
 ENGRAVING-RADUIS-ENDMILL-SC-E25UF-+-EZI_ALPHA ·
 GRAVIERSTICHEL-MIT-RADUIS-HM-E25UF-+-EZI_ALPHA



SWISS MADE

21805B-R0.10-30

Version 07.05.2026

E25
UF


CARBIDE TOOL MATERIAL E25 UF

MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	21805B-R0.10-30
Alloyed and non-alloyed steels <small>Non-alloyed steels</small>	Rm < 450 N/mm ²	1a	●●●
	Rm 450-700 N/mm ²	1b	●●●
	Rm 700-900 N/mm ²	1c	●●●
	Rm > 1200 N/mm ²	1d	●●●
Stainless steels <small>Stainless steels</small>	Rm < 650 N/mm ²	2a	●●●
	Rm 650-950 N/mm ²	2b	●●●
	Rm > 950 N/mm ²	2c	●●●
Hardened steels <small>Hardened steels</small>	44-56 HRC	3a	●●○
	57-67 HRC	3b	●○○
Exotic materials <small>Special alloys</small>	< 32 HRC	4a	●●○
	> 32 HRC	4b	●●○
Graphite <small>Industrial graphite</small>		5	●●○
Cast iron <small>Grey / nodular cast iron</small>	< 32 HRC	6a	●●●
	> 32 HRC	6b	●●●
Titanium <small>Titanium alloys</small>	Rm < 600 N/mm ²	7a	●●●
	600 < Rm N/mm ²	7b	●●●
Nickel alloys <small>Inconel, Hastelloy</small>	Rm < 1000 N/mm ²	8a	●●○
	Rm > 1000 N/mm ²	8b	●●○
Copper, brass, bronze <small>Copper-based</small>	Rm < 850 N/mm ²	9a	●○○
	Rm > 850 N/mm ²	9b	●○○
Aluminum <small>Aluminum alloys</small>	Si < 0.5%	10a	●○○
	0.5% < Si < 5%	10b	●○○
	Si > 5%	10c	●●○
Synthetic materials <small>Engineering plastics</small>	Thermoplastic	11a	●○○
	Thermoset	11b	●○○
Composite materials <small>Reinforced composites</small>	Glass fiber / GFK	12a	●●○
	Carbon fiber / KFK	12b	●●○
Precious metals <small>Gold, platinum, silver</small>	Gold	13a	●●○
	Platinum	13b	●●○

TECHNICAL DRAWING

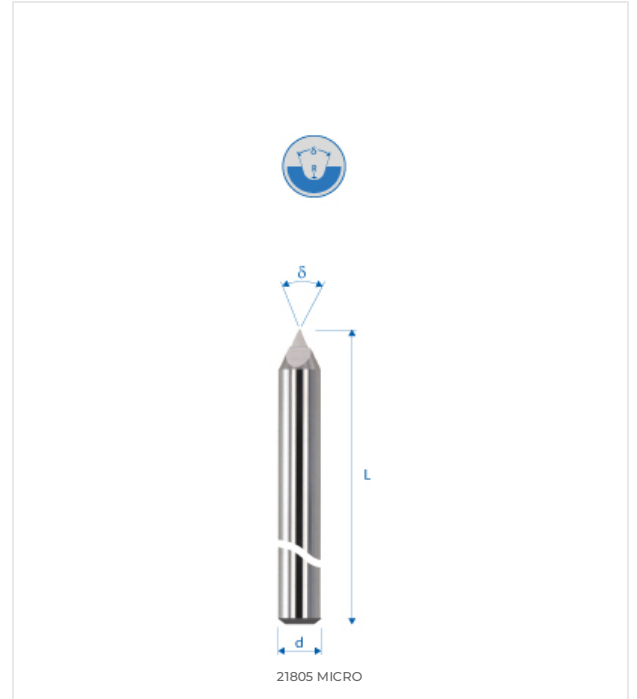

DIMENSIONS

NOMINAL DIMENSIONS

D (0 / -0.01)	0.2 mm
d (h5)	3 mm
L	38 mm
l1	1.2 mm
l3	-
d3	-
R	0.1 mm
e	-
Z	1
Chamfer K	-
w° collision	11.2°



E-SHOP / EZI CUT
 eskenazi.ch/eshop/21805B-R0.10-30

© 2026 Eskenazi SA — Carouge, Genève
 All rights reserved