


# MICRO-FRAISE · Z3-MICRO-MILLING-CUTTER-FOR-FINISHING-WATCH-COMPONENTS-AND-701S-MACHINE · MIKROFRÄSE



SWISS MADE

24161T-2

Version 22.06.2026

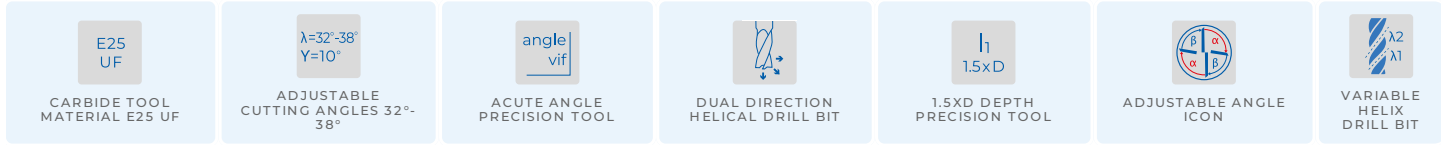


## MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

MATERIAL	SPECIFICATION	GRP	24161T-2
<b>Alloyed and non-alloyed steels</b> Non-alloyed steels	Rm < 450 N/mm <sup>2</sup>	1a	●●●
	Rm 450-700 N/mm <sup>2</sup>	1b	●●●
	Rm 700-900 N/mm <sup>2</sup>	1c	●●●
	Rm > 1200 N/mm <sup>2</sup>	1d	●●●
<b>Stainless steels</b> Stainless steels	Rm < 650 N/mm <sup>2</sup>	2a	●●●
	Rm 650-950 N/mm <sup>2</sup>	2b	●●●
	Rm > 950 N/mm <sup>2</sup>	2c	●●●
<b>Hardened steels</b> Hardened steels	44-56 HRC	3a	●●●
	57-67 HRC	3b	●●○
<b>Exotic materials</b> Special alloys	< 32 HRC	4a	●●●
	> 32 HRC	4b	●●●
<b>Graphite</b> Industrial graphite		5	●●○
<b>Cast iron</b> Grey / nodular cast iron	< 32 HRC	6a	●●○
	> 32 HRC	6b	●●○
<b>Titanium</b> Titanium alloys	Rm < 600 N/mm <sup>2</sup>	7a	●●●
	600 < Rm N/mm <sup>2</sup>	7b	●●●
<b>Nickel alloys</b> Inconel, Hastelloy	Rm < 1000 N/mm <sup>2</sup>	8a	●●○
	Rm > 1000 N/mm <sup>2</sup>	8b	●●○
<b>Copper, brass, bronze</b> Copper-based	Rm < 850 N/mm <sup>2</sup>	9a	●●○
	Rm > 850 N/mm <sup>2</sup>	9b	●●○
<b>Aluminum</b> Aluminum alloys	Si < 0.5%	10a	●●○
	0.5% < Si < 5%	10b	●●○
	Si > 5%	10c	●●○
<b>Synthetic materials</b> Engineering plastics	Thermoplastic	11a	○○○
	Thermoset	11b	○○○
<b>Composite materials</b> Reinforced composites	Glass fiber / GFK	12a	●●○
	Carbon fiber / KFK	12b	●●○
<b>Precious metals</b> Gold, platinum, silver	Gold	13a	●●○
	Platinum	13b	●●○

## TECHNICAL DRAWING

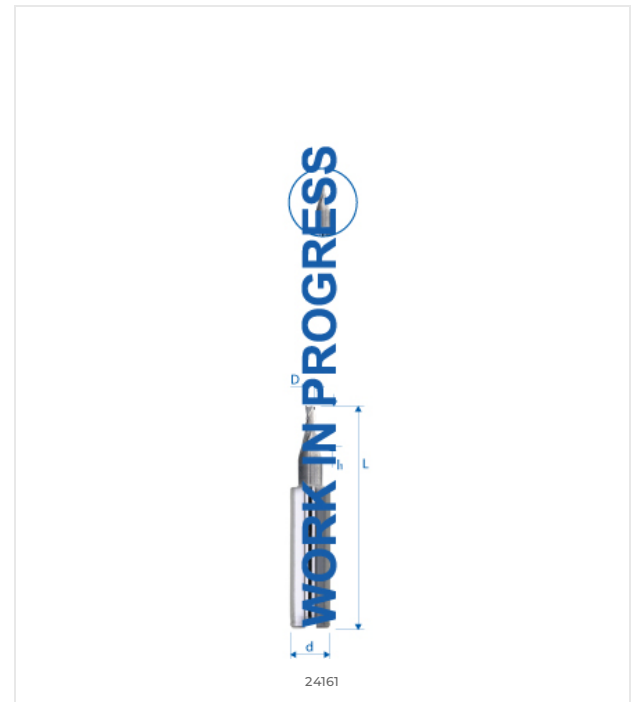

## DIMENSIONS

NOMINAL DIMENSIONS	
D (0 / -0.01)	2 mm
d (h5)	6 mm
L	33 mm
l1	2.5 mm
l3	-
d3	-
R	-
e	-
Z	3
Chamfer K	-
w° collision	10.4°



**E-SHOP / EZI CUT**  
eskenazi.ch/eshop/24161T-2