

# FORET-2-LÈVRES-MD-E25UF-+-EZI-SMOOTH · 2-FLUTES-DRILL-SC-E2-5-UF-+-EZI-SMOOTH · ZWEI-LIPPEN-BOHRER-HM-E25-UF-+-EZI-SMOOTH



SWISS MADE

48351S-0.41

Version 07.05.2026

E25  
UF

CARBIDE TOOL MATERIAL E25 UF

$\lambda = 20^\circ$

20° LAMBDA CUTTING ANGLE



90° RIGHT ANGLE DRILL BIT




STANDARD TOOL WEAR INDICATOR

## MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

| MATERIAL  | SPECIFICATION                | GRP | 48351S-0.41 |
|---|------------------------------|-----|-------------|
| <b>Alloyed and non-alloyed steels</b><br>Non-alloyed steels | Rm < 450 N/mm <sup>2</sup>   | 1a  | ●●●         |
|   | Rm 450–700 N/mm <sup>2</sup> | 1b  | ●●●         |
|   | Rm 700–900 N/mm <sup>2</sup> | 1c  | ●●●         |
|   | Rm > 1200 N/mm <sup>2</sup>  | 1d  | ●●●         |
| <b>Stainless steels</b><br>Stainless steels                 | Rm < 650 N/mm <sup>2</sup>   | 2a  | ●●●         |
|   | Rm 650–950 N/mm <sup>2</sup> | 2b  | ●●●         |
|   | Rm > 950 N/mm <sup>2</sup>   | 2c  | ●●●         |
| <b>Hardened steels</b><br>Hardened steels                   | 44–56 HRC                    | 3a  | ●●○         |
|   | 57–67 HRC                    | 3b  | ●○○         |
| <b>Exotic materials</b><br>Special alloys                   | < 32 HRC                     | 4a  | ●●●         |
|   | > 32 HRC                     | 4b  | ●●●         |
| <b>Graphite</b><br>Industrial graphite                      |                              | 5   | ●●●         |
| <b>Cast iron</b><br>Grey / nodular cast iron                | < 32 HRC                     | 6a  | ●●●         |
|   | > 32 HRC                     | 6b  | ●●●         |
| <b>Titanium</b><br>Titanium alloys                          | Rm < 600 N/mm <sup>2</sup>   | 7a  | ●●●         |
|   | 600 < Rm N/mm <sup>2</sup>   | 7b  | ●●●         |
| <b>Nickel alloys</b><br>Inconel, Hastelloy                  | Rm < 1000 N/mm <sup>2</sup>  | 8a  | ●●○         |
|   | Rm > 1000 N/mm <sup>2</sup>  | 8b  | ●●○         |
| <b>Copper, brass, bronze</b><br>Copper-based                | Rm < 850 N/mm <sup>2</sup>   | 9a  | ●●●         |
|   | Rm > 850 N/mm <sup>2</sup>   | 9b  | ●●●         |
| <b>Aluminum</b><br>Aluminum alloys                          | Si < 0.5%                    | 10a | ●●○         |
|   | 0.5% < Si < 5%               | 10b | ●●●         |
|   | Si > 5%                      | 10c | ●●●         |
| <b>Synthetic materials</b><br>Engineering plastics          | Thermoplastic                | 11a | ●●●         |
|   | Thermoset                    | 11b | ●●●         |
| <b>Composite materials</b><br>Reinforced composites         | Glass fiber / GFK            | 12a | ●●●         |
|   | Carbon fiber / KFK           | 12b | ●●●         |
| <b>Precious metals</b><br>Gold, platinum, silver            | Gold                         | 13a | ●●●         |
|   | Platinum                     | 13b | ●●○         |

## TECHNICAL DRAWING

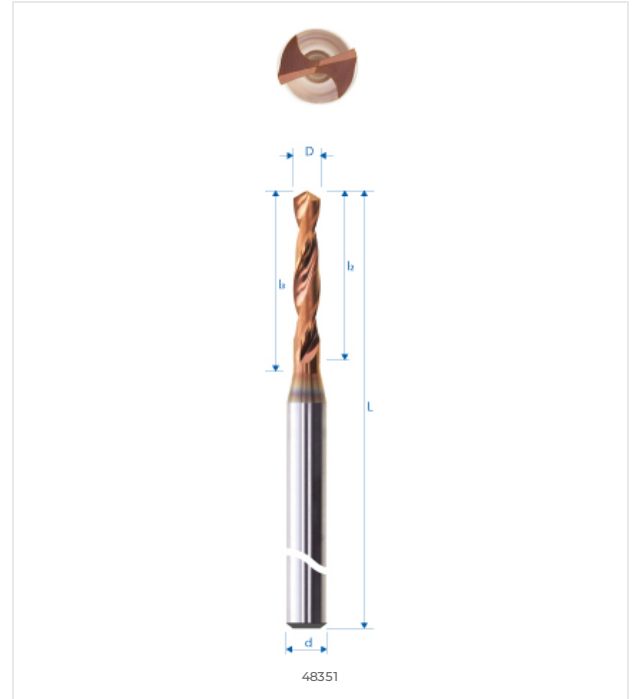

## DIMENSIONS

### NOMINAL DIMENSIONS

|               |         |
|---------------|---------|
| D (0 / -0.01) | 0.41 mm |
| d (h5)        | 3 mm    |
| L             | 38 mm   |
| l1            | 2.7 mm  |
| l3            | 3.6 mm  |
| d3            | –       |
| R             | –       |
| e             | –       |
| Z             | 2       |
| Chamfer K     | –       |
| w° collision  | 8.3°    |



E-SHOP / EZI CUT  
eskenazi.ch/eshop/48351S-0.41

© 2026 Eskenazi SA — Carouge, Genève  
All rights reserved